

SHUNTS

DC SHUNTS

MODEL S

DESCRIPTION

- For inputs to shunt rated DC ammeters, DC watt transducers (model MT) and shunt isolators (model VT7)
- Available in 50mV or 100mV models.
- $\pm 0.25\%$ of calibrated accuracy




NOTE:

These shunts are designed to be run at 2/3 of rated current. A 10A application would require a 15A shunt. This is required to maintain accuracy.

| 50mV Shunts | | | 100mV Shunts | | |
|-------------|-------------|-----------|--------------|-------------|-----------|
| Amps | Catalog No. | Ref. Fig. | Amps | Catalog No. | Ref. Fig. |
| 10 | S50-010 | A | 10 | S100-010 | A |
| 15 | S50-015 | A | 15 | S100-015 | A |
| 20 | S50-020 | A | 20 | S100-020 | A |
| 30 | S50-030 | A | 30 | S100-030 | A |
| 50 | S50-050 | A | 50 | S100-050 | A |
| 100 | S50-100 | A | 100 | S100-100 | A |
| 200 | S50-200 | B | 200 | S100-200 | B |
| 300 | S50-300 | B | 300 | S100-300 | B |
| 500 | S50-500 | B | 500 | S100-500 | B |
| 750 | S50-750 | C | 750 | S100-750 | C |
| 1000 | S50-1000 | C | 1000 | S100-1000 | C |
| 1200 | S50-1200 | C | 1200 | S100-1200 | C |

DIMENSIONS

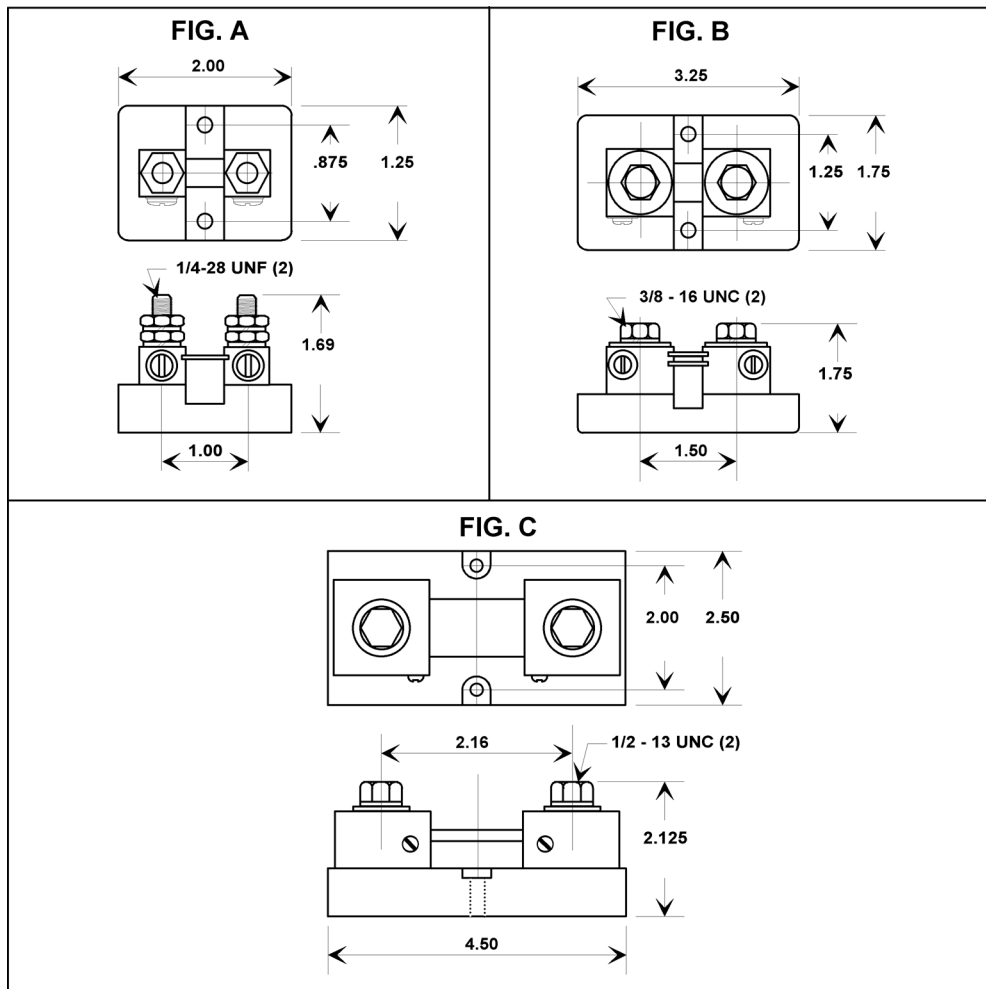

All Dimensions In Inches

SHUNTS

FLEX-CORE®

Div. Morlan & Associates, Inc.

4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538