

CURRENT TRANSFORMERS

RELAY CLASS SPLIT CORE CURRENT TRANSFORMER *MODEL FCR-R822*

FEATURES

- Split Core Design
- Zero Sequence Applications (50A)
- Relaying Applications
- Window I.D. - 8.00" x 22.00"
- Heat Set Polyester and Varnish Construction
- Indoor Use

600V CLASS

MADE IN U.S.A.



SPECIFICATIONS




Frequency 60Hz
 Insulation class 0.6kV, 10kV BIL Full Wave
 Terminals No. 10-32 Screws with Shorting Strap
 Recommended Screw Torque 11 in-lbs Max
 Weight Approximately 120 Lbs.
 Rating Factor 2.0 @ 30°C
 Manufactured to meet the requirements of ANSI/IEEE C57.13

APPLICATION AND ORDERING DATA

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS
FCR50/5-R822	50:5	C10
FCR100/5-R822	100:5	C20
FCR200/5-R822	200:5	C50
FCR300/5-R822	300:5	C50

DIMENSIONS

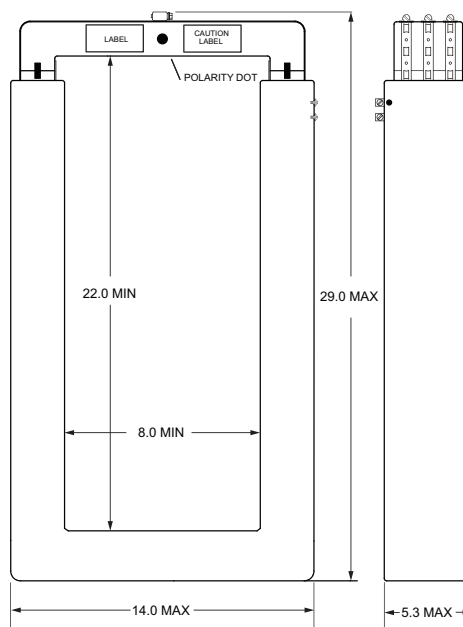

All Dimensions In Inches

- Certified test reports available for purchase upon request.
- Remove shorting strap before energizing CT.
- Mounting Kit not available for this size model.

FLEX-CORE®

Div. Morlan & Associates, Inc.

4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538