

CURRENT TRANSFORMERS

SOLID CORE CURRENT TRANSFORMER

MODEL 2RL

FEATURES

- UL Recognized
- Window I.D. - 1.05"
- Use with Ammeters

600V CLASS

UL E238872

SP 245941


MADE
IN U.S.A.



SPECIFICATIONS

Frequency 50-400Hz
 Insulation Class 0.6kV, 10kV BIL Full Wave
 Flexible Leads UL1015, 105°C, CSA approved, 16 AWG, 24"
 Weight Approximately 0.5 Lb.

DIMENSIONS

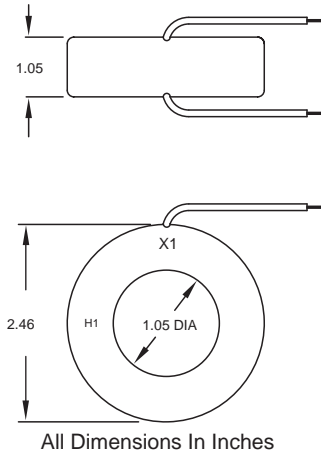

APPLICATION AND ORDERING DATA			
CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60Hz	BURDEN VA AT 60Hz
2RL-500	50:5	+3%	2.0
2RL-600	60:5	+2%	2.0
2RL-750	75:5	+2%	2.0
2RL-800	80:5	+2%	2.0
2RL-101	100:5	+1%	2.0
2RL-121	120:5	+1%	2.5
2RL-1250	125:5	+1%	2.5
2RL-151	150:5	+1%	4.0
2RL-201	200:5	+1%	4.0
2RL-251	250:5	+1%	6.0
2RL-301	300:5	+1%	8.0
2RL-401	400:5	+1%	10.0

SOLID CORE CURRENT TRANSFORMER

MODEL 7RL

FEATURES

- UL Recognized
- Window I.D. - 2.50"
- Use with Ammeters and Watt Meters

600V CLASS

UL E238872

SP 245941


MADE
IN U.S.A.



SPECIFICATIONS

Frequency 50-400Hz
 Insulation Class 0.6kV, 10kV BIL Full Wave
 Flexible Leads UL1015, 105°C, CSA approved, 16 AWG, 24"
 Weight Approximately 1.5 Lbs.

DIMENSIONS

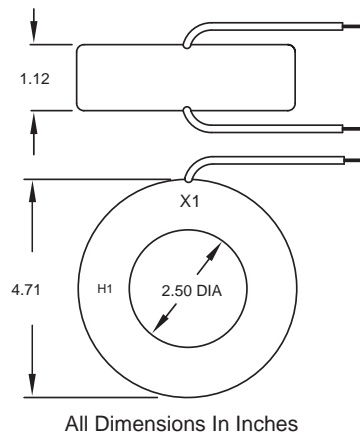

APPLICATION AND ORDERING DATA			
CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60Hz	BURDEN VA AT 60Hz
7RL-301	300:5	+1%	12.5
7RL-401	400:5	+1%	15.0
7RL-501	500:5	+1%	25.0
7RL-601	600:5	+1%	30.0
7RL-751	750:5	+1%	30.0
7RL-801	800:5	+1%	35.0
7RL-102	1000:5	+1%	35.0
7RL-122	1200:5	+1%	35.0
7RL-152	1500:5	+1%	40.0
7RL-162	1600:5	+1%	45.0

FLEX-CORE®

Div. Morlan & Associates, Inc.

4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538